

M2

Live Condenser Microphone

RØDE[®]
MICROPHONES




Features

- Live condenser vocal microphone
- Feedback rejecting super-cardioid pick up pattern
- Locking on/off switch
- Heavy duty metal body
- High level of RF rejection
- Low handling noise
- Designed and manufactured in Australia
- Full 10 year warranty*


Specifications

Acoustic Principle	Pressure gradient	Directional Pattern	Super-Cardioid
Frequency Range	35Hz ~ 20,000Hz	Sensitivity	-44dB \pm 2dB re 1V/Pa (6.3mV @ 94 dB SPL) @ 1kHz
Nominal Impedence	50 Ω	Equivalent Noise	23dBA SPL (A - weighted per IEC651)
Maximum Output	+5.2dBu (@ 1% THD into 1k Ω)	Dynamic Range	118dB (per IEC651)
Maximum SPL	141dB (@ 1kHz, 1% THD into 1k Ω load)	Signal/Noise	71dB SPL (A - weighted per IEC651)
Power Req.	24/48V Phantom Power	Dimensions	Length - 187mm Diameter - 47mm
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)	Shipping Weight	545g
Net Weight	308g		

Frequency Response

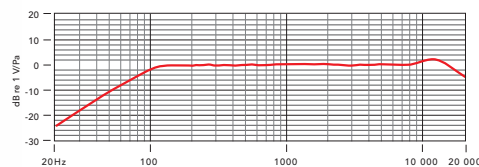

Polar Pattern



Included Accessories

- RM1 stand mount
- ZP1 zip pouch



www.rodemic.com

*After online registration

Australia
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 4189 Santa Barbara CA 93140 USA
Ph: +1 805 566 7777 Fx: +1 805 566 0071