


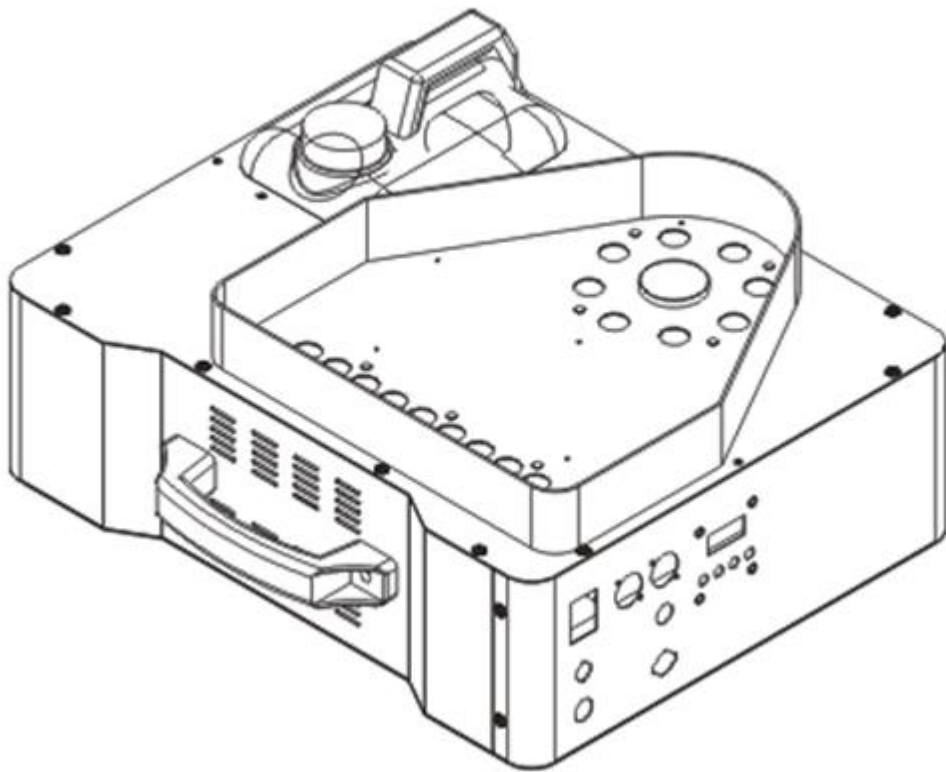

TWO COLORS FOG JET

Operation:

DMX-512 address and channel modes:

First page “**addr**” is for dmx address, enter display, then you can choose both 9 channels and 6 channels. Enter display, it will show d001, you can select the dmx address for both channels’ modes..

Wireless remoter:

Second page “**reno**” is wireless setting, enter this page you will find out 8 pages from b-01 to b-08 by “UP/DOWN”. You can choose different effects from Co 0 to Co 7 and from Pr 1 to Pr 4 for 8 buttons on wireless remote by enter each display of b-01, b-02, ... , b-08.

Notes: b-01, b-02, ..., b-08 = button 1, button 2, ...button 8 on wireless remote.

Code	Function	LED type
Co 0	Fog output	
Co 1	Fog output + Red color	LED around Nozzle
Co 2	Fog output + Red + Green color	
Co 3	Fog output + Green color	
Co 4	Fog output + Green + Blue color	
Co 5	Fog output + Blue color	
Co 6	Fog output + Blue + Red color	
Co 7	Fog output + White color	

Manual fog output:

Third page “**Cust**”, is for setting the color fog output of manual fog button on machine. Enter this page will show” r-, g-, b-, NACo:

1. You can select the light brightness by enter each r-, g-, b- for LED around Nozzle.
2. You can select the different colors by enter Naco for the second group led.

Fluid running output protection:

Four page “**NoFu**”: You can select ON/OFF of fluid running out protection.
NoFu = No Fluid protection. It will show and flash on display when fluid is running out.

Second group LED:

Five page “**AUXC**” is for setting the second group led for 8 buttons on wireless remote, enter this page, then will show b-01, b-02, ..., b-08, you can enter each button to set each button’s led output.

DMX Chart

9 Channel mode:

CH	Value	Function	LED type
CH 1	016-255	Fog output	
CH 2	001-255	White color (with dimmer function)	LED around Nozzle
CH 3	001-255	Red color (with dimmer function)	
CH 4	001-255	Green color (with dimmer function)	
CH 5	001-255	Blue color	
CH 6	016-255	Strobe effect from slow to fast.	
CH 7	016-036	Red color	
	037-056	Red green color	
	057-076	Green color	
	077-096	Blue color	
	097-116	Red blue color	
	117-136	Green blue color	
	137-156	White color	
	157-176	R/G/B colors change (slow smooth change)	
	177-196	7 colors change (slow smooth change)	
	197-216	R/G/B color change (fast change)	
	217-255	7 colors change (fast change)	
CH 8	016-050	Red color	Second group LED
	051-085	Red green color	
	086-120	Green color	
	121-155	Green blue color	
	156-190	Blue color	
	191-225	Red blue color	
	226-255	White color	
CH9	016-255	Colors change	

6 Channel mode:

CH	Value	Function	LED type
CH 1	016-255	Fog output	
CH 2	001-255	Red color	LED around Nozzle
CH 3	001-255	Green color	
CH 4	001-255	Blue color	
CH 5	016-050	Red color	Second group LED
	051-085	Red + Green color	
	086-120	Green color	
	121-155	Green + Blue color	
	156-190	Blue color	
	191-225	Blue + Green color	
	226-255	White color	
CH 6	016-255	Colors change	